

# OMNI print i n c .

## Product Features

- 12 NOZZLE PRINTHEAD
- BI-DIRECTIONAL/LOGIC SEEKING
- 5.0 LPS PRINTING SPEED
- 18 LPS PAPER FEED
- HP INK CARTRIDGE
- GRAPHICS
- LOGO PRINTING
- 16K BYTES BUFFER
- AUTO PAPER LOADING
- PAPER LOW/OUT SENSOR
- IVORY & GRAY CASE COLORS
- INTERNATIONAL CERTIFICATIONS

## Applications

- POINT OF SALE
- FINE DINNING
- BANKING
- CAT TERMINALS

IJ200



THE PACKAGE IS OMNIPRINT'S EXCLUSIVE SPLASH PROOF™ DESIGN; ROBUST ENOUGH FOR ALL INSTALLATIONS. THE IJ200 IS THE IDEAL PRINTER FOR APPLICATIONS REQUIRING SILENT PRINTING AND PLAIN PAPER.

# IJ200

# print i n c .

<b>MODEL</b>	<b>IJ200</b>	
<b>PRINT METHOD</b>	NOZZLE SERIAL INKJET DOT MATRIX	
<b>PRINT DIRECTION</b>	BI-DIRECTIONAL, LOGIC SEEKING	
<b>NO. OF COLUMNS</b>	40, 280 DOTS PER INCH	
<b>FONT SIZE</b>	10 x 12	
<b>LINE SPACING</b>	n = 144	
<b>PRINTING WIDTH</b>	2.50 INCHES	
<b>PRINT SPEED</b>	5 LINES PER SECOND	
<b>PAPER FEED SPEED</b>	18 LINES PER SECOND	
<b>INK CARTRIDGE</b>	HP 51604A	
<b>PAPER</b>	Media	ROLL PAPER
	Width	3 INCHES
	Diameter	3 INCHES
<b>DATA BUFFER</b>	16K BYTES	
<b>CASH DRAWER DRIVER</b>	2 CIRCUITS (24V, 1 AMP MAX)	
<b>INTERFACE</b>	RS 232C SERIAL OR CENTRONICS PARALLEL	
<b>EMULATION'S</b>	EPSON™ TM-U200, STAR MICRONICS™ SP 200, CITIZEN™ IDP 3540, VERIPHONE™ P900	
<b>POWER SUPPLY</b>	Type	EXTERNAL ADAPTER (Supplied)
	Input	120 VAC, 220 VAC, OR 90 - 230 VAC
	Output	25 VDC 1.5 AMP
<b>OPERATING CONDITION (c)</b>	5°C TO 40°C, 10% TO 80 % RH	
<b>STORAGE CONDITION (c)</b>	-20°C TO 60°C, 5% TO 95% RH	
<b>RELIABILITY</b>	MCBF	5 MILLION LINES
	Printhead	1 MILLION CHARACTERS
<b>DIMENSIONS (INCHES W x D x H)</b>	6.88 x 8.60 x 5.20	
<b>WEIGHT (lbs)</b>	3.7	
<b>CERTIFICATIONS</b>	FCC, c/UL, CE, LVD	



S. CBL625F25M  
P. CBL625F25M-STR



PP300-165




HP 51604A



OM200

## External Dimensions

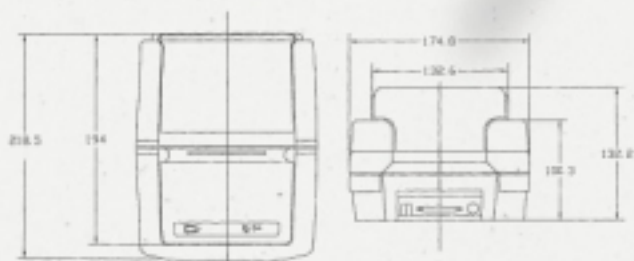

OMNIPrint, Inc.  
14 Chrysler, Irvine, CA 92618, USA  
Telephone : (949) 457-0229  
Fax : (949) 457-9016  
www.omniprintinc.com

