

# OMNI print i n c .

## Product Features

- 9 PIN PRINTHEAD
- LOGIC SEEKING
- TWO COLOR
- GRAPHICS / LOGO PRINTING
- HIGH SPEED
- 16K BYTES BUFFER
- AUTO PAPER LOADING
- ULTRA RELIABLE
- AUTO PAPER CUTTER
- 1.5 MILLION CUTTER LIFE
- PAPER LOW/OUT SENSOR
- INTERNATIONAL CERTIFICATIONS

**OM200**



## Applications

- POINT OF SALE
- KITCHEN
- FAST FOOD
- HARSH ENVIRONMENT

THE SPLASH-PROOF™ CASE IS IDEAL FOR KITCHEN AND HARSH ENVIRONMENTS AND PROVISIONS HAVE BEEN MADE FOR WALL MOUNTING THE PRINTER.

# OM200

# print i n c .

<b>MODEL</b>	<b>OM200</b>	
<b>PRINT METHOD</b>	9-PIN SERIAL IMPACT DOT MATRIX	
<b>PRINT DIRECTION</b>	BI-DIRECTIONAL, LOGIC SEEKING	
<b>NO. OF COLUMNS</b>	EPSON EMULATION : 42/35, 40/32 OTHER EMULATIONS : 40/32	
<b>FONT SIZE</b>	5 x 9, 7 x 9 DOTS	
<b>LINE SPACING</b>	n/144 INCH	
<b>PRINTING WIDTH</b>	2.50 INCHES	
<b>PRINT SPEED</b>	5.0 LINES/SEC (40 COLUMNS)	
<b>INK RIBBON</b>	ERC - 23, ERC - 38 PURPLE and BLACK, RED and BLACK	
<b>PAPER</b>	Media	ROLL PAPER
	Width	3" MAX
	Diameter	3 INCHES
	Copies	3 PLY MAX. (0.2mm or 0.008" THICK)
<b>DATA BUFFER</b>	16 K BYTES	
<b>DRIVER</b>	2 CIRCUIT 24 VDC 1 AMP	
<b>INTERFACE</b>	RS 232C SERIAL, CENTRONICS PARALLEL	
<b>EMULATION'S</b>	EPSON™ TM-U200, CITIZEN™ iDP-3540 STAR MICRONICS™ SP 200, VERIFONE™ P900	
<b>POWER SUPPLY</b>	Type	EXTERNAL ADAPTER (Supplied)
	Input	110 VAC, 220 VAC, OR 90-230 VAC
	Output	25 VDC x 1.5 AMPS
<b>OPERATING CONDITION (c)</b>	5°C TO 40°C, 10% TO 80% RH	
<b>STORAGE CONDITION (c)</b>	-20°C TO 60°C, 5% TO 95% RH	
<b>RELIABILITY</b>	MCBF	5 MILLION LINES
	Printhead	150 MILLION CHARACTERS
<b>DIMENSIONS (INCHES W x D x H)</b>	6.88" x 8.60" x 5.20"	
<b>WEIGHT (lbs)</b>	Cutter	4.8
	Non cutter	3.7
<b>CERTIFICATIONS</b>	FCC, cUL, CE, LVD	



S. CBL625F25M  
P. CBL625F25M-STR



PP300-165




ERC-38B/R



OM100

## External Dimensions

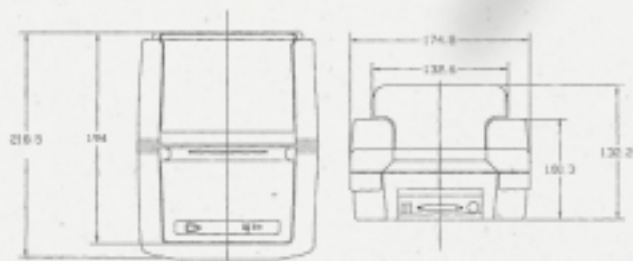

OMNIPrint, Inc.  
14 Chrysler, Irvine, CA 92618, USA  
Telephone : (949) 457-0229  
Fax : (949) 457-9016  
www.omniprintinc.com

