

OMNI print i n c .

Product Features

- THERMAL LINE HEAD
- CLAMSHELL TYPE PAPER LOADING
- 2 IN. / SEC. PRINT SPEED
- BAR CODE/GRAPHICS/LOGO
- 8 DOT PER mm RESOLUTION
- SUPPLIED WITH SOFTWARE
- LABEL SENSOR
- COMPACT CASE DESIGN
- INTERNATIONAL CERTIFICATIONS
- WINDOWS 95 & 98 DRIVERS

OM-L60II



Applications

- MANUFACTURING
- RETAIL
- WAREHOUSE
- MEDICAL

DESIGNED FOR APPLICATIONS REQUIRING MAXIMUM FEATURES IN A MINIMUM FOOTPRINT. THE FULL FEATURED PRINTER IS AVAILABLE WITH OPTIONAL LCD AND KEYPAD CONTROLS.

OM-L60II

print i n c .

MODEL	OM-L60	OM-L60 PRO
PRINT METHOD	DIRECT THERMAL LINE HEAD	
DOT DENSITY	8 DOTS PER mm	
MAXIMUM PRINT WIDTH	2.2 IN. / 56mm	
MEDIA SENSING	BLACK MARK SENSOR	
PRINT SPEED	2.0 INCHES PER SEC.	
FONTS	ASCII, 10 STYLES, UP TO 10 MAGNIFICATION	
BAR CODE SYMBOLOGIES	UPC-A, UPC-E, EAN-13, EAN-8, ITF, CODE 39 CODABAR, CODE 128A, B, C	
PAPER	Media	ROLL PAPER, DIE CUT, CONTINUOUS
	Width	60mm MAX
	Diameter	4.8 INCHES
LOADING	CLAMSHELL TYPE	
MEMORY	4MB PROGRAM, 128KB IMAGE BUFFER, 32 VO BUFFER	
CPU	16 BIT PROCESSOR	
INTERFACE	BI-DIRECTIONAL RS 232C SERIAL (CABLE SUPPLIED)	
PROGRAMMING	LOW LEVEL COMMAND CONTROL LANGUAGE QUICK-LABEL PROGRAM (INCLUDED)	
POWER SUPPLY	Type	EXTERNAL ADAPTER
	Input	100-240 VAC
	Output	24 VDC x 2.0 AMPS
OPERATING CONDITION (c)	5°C TO 40°C, 10% TO 80% RH	
STORAGE CONDITION (c)	-15°C TO 50°C, 5% TO 95% RH	
BARPRO OPERATOR PANEL	16x2 LCD CHARACTER MODULE	
	10 NUMBER, 9 FUNCTION, RUBBER KEYPAD	
DIMENSIONS (INCHES WxDxH)	3.9" x 8.6" x 7.0"	
WEIGHT(lbs)	5.07	
CERTIFICATIONS	FCC, cUL, CE, LVD	



CH8366



LABEL STOCK




INCLUDED



OM-L60 PRO

External Dimensions

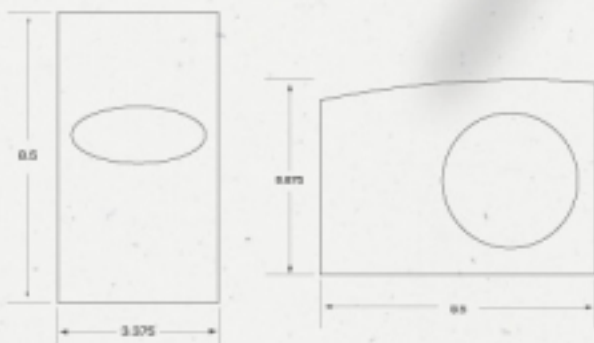

OMNIPrint, Inc.
14 Chrysler, Irvine, CA 92618, USA
Telephone : (949) 457-0229
Fax : (949) 457-9016
www.omniprintinc.com

