


# POMNI *print* i n c .

## **OPC8000**

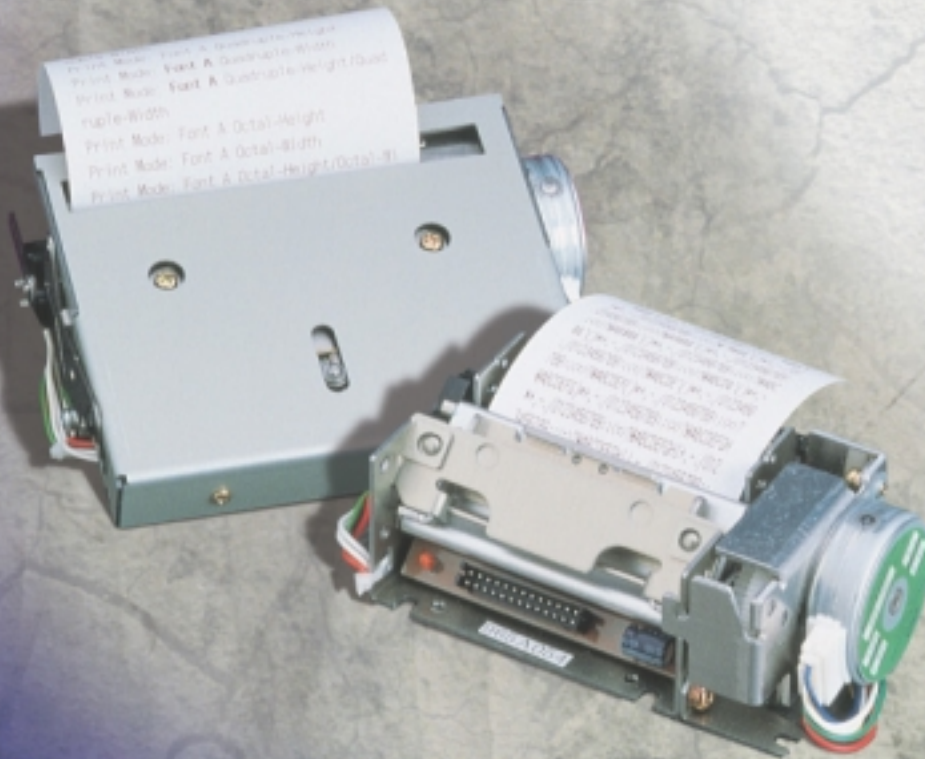

### Product Features

- Thermal Line Head
- 60, 80, 112 mm Paper Widths
- Integrated Auto Cutter
- 1.5 Million Cut Life
- Peripheral Driver
- Graphics / Bar Code
- 24 VDC Power Supply
- Up to 8" Paper Roll

### Applications

- Medical
- Scientific
- Point of Sale
- Kiosk

The OPC8000 Series of Line Thermal Printers is ideal for a wide range of high performance applications.

# OPC8000



**OB8000**



**TP60-220, TP8-135  
TP112-135**





**CBL 8000 SET**



**CH8000**

MODEL	OPC8200	OPC8300	OPC8400
PRINT METHOD	THERMAL LINE HEAD		
DOT DENSITY	8 DOTS PER mm		
NO. OF COLUMNS	34	40/42	59/64
HEAD RESOLUTION	448 DOTS	576 DOTS	832 DOTS
FONT SIZE	9 x 24 or 12 x 24		
PAPER FEED PITCH	0.125 mm		
PRINTING WIDTH	56 mm	72 mm	104 mm
PRINT SPEED	3 IPS	2.5 IPS	2 IPS
PAPER	Media	THERMAL ROLL PAPER (TF50KS-E)	
	Width	60 mm	80 mm
			112 mm
	Diameter	8" (MAX)	
DATA BUFFER	4 K BYTES		
PERIPHERAL DRIVER	1 CIRCUIT, 24 VDC, 2 AMPS		
INTERFACE	RS 232 SERIAL, CENTRONICS PARALLEL		
EMULATION	EPSON™ TM-T85, TM-T88		
OPTIONS	PAPER LOW DETECTION, AUTO CUTTER		
POWER SUPPLY	24 VDC, 1.5 AMPS (TYPICAL)		
OPERATING CONDITION (c)	0° TO 40°		
STORAGE CONDITION (c)	-20° TO 60°		
RELIABILITY	100 MILLION PULSES, 100 KILOMETERS OF PAPER		
DIMENSIONS mm	MECH. 105 x 55 x 36	125 x 55 x 36	160 x 55 x 36
W x D x H	CONT. 100 x 120	100 x 120	100 x 120
WEIGHT (gr)	MECH. 260	330	450
	CONT. 170	170	170

## External Dimensions

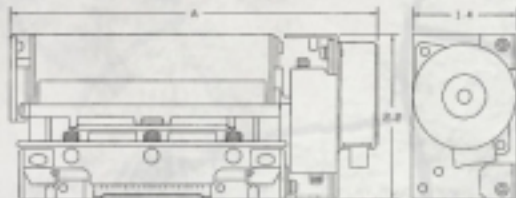

**OMNI**Print, Inc.  
 14 Chrysler, Irvine, CA 92618, USA  
 Telephone : (949) 457-0229  
 Fax : (949) 457-9016  
[www.omniprintinc.com](http://www.omniprintinc.com)

