


# OMNI print i n c .

## Product Features

- IMPACT SHUTTLE HEAD
- AUTOMATIC PAPER LOADING
- 5VDC, 12 OR 24VDC OPTIONAL
- MODERN COMPACT DESIGN
- 4K BYTES BUFFER
- GRAPHICS
- PAPER LOW SENSOR
- TIME & DATE
- PARALLEL OR SERIAL INTERFACE

**PM190**

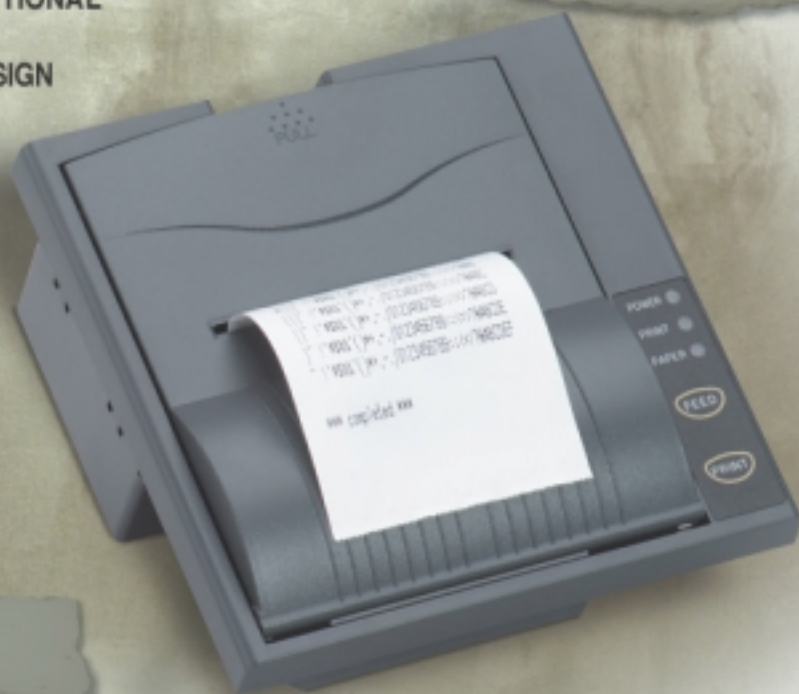

## Applications

- PROCESS EQUIPMENT
- ACCESS CONTROL
- MEDICAL
- SCIENTIFIC

THE PM190 IS THE IDEAL PANEL MOUNT PRINTER FOR A WIDE RANGE OF HIGH PERFORMANCE PROCESS MONITORING AND DATA RECORDING APPLICATIONS.

# PM190

# OmniPrint inc.

<b>MODEL</b>	PM190/192	
<b>PRINT METHOD</b>	IMPACT DOT MATRIX	
<b>PRINT DIRECTION</b>	SHUTTLE TYPE HEAD	
<b>NO. OF COLUMNS</b>	24 or 40	
<b>FONT SIZE</b>	5 x 7 MATRIX	
<b>LINE SPACING</b>	3 DOTS	
<b>PRINTING WIDTH</b>	240 DOTS PER LINE	
<b>PRINT SPEED</b>	1.5 LPS	
<b>INK RIBBON</b>	ERC - 09, ERC - 22 LONG LIFE, BLACK OR PURPLE	
<b>PAPER</b>	Media	ROLL PAPER
	Width	2.25"
	Diameter	2.25"
	Copies	2 PLY (0.085mm)
<b>DATA BUFFER</b>	4K BYTES	
<b>INTERFACE</b>	RS232 SERIAL, CENTRONICS PARALLEL	
<b>EMULATION</b>	EPSON™ ESC/POS	
<b>POWER SUPPLY</b>	5.0 VDC - 12 OR 24 VDC OPTIONAL	
<b>OPERATING CONDITION (c)</b>	0° TO 50° 10 TO 85% RH	
<b>STORAGE CONDITION (c)</b>	-25° TO 60° 0 TO 90% RH	
<b>RELIABILITY (MCBF)</b>	1.5 MILLION LINES	
<b>DIMENSIONS (in x w x d)</b>	PANEL CUTOUT	110 mm x 110 mm
	OVERALL	126mm x 126mm x 40mm
<b>WEIGHT (gr)</b>	448	



OPC1900



PP225  
TP58-90




CABLE SETS



OPC190

## External Dimensions

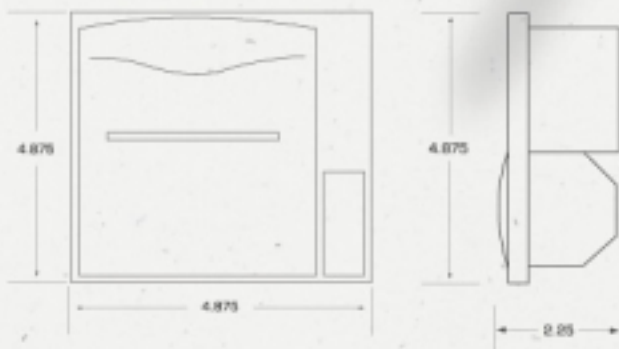

OMNIPrint, Inc.  
14 Chrysler, Irvine, CA 92618, USA  
Telephone : (949) 457-0229  
Fax : (949) 457-9016  
www.omniprintinc.com

